

Hydrotech®

HTO Up Flow Series Whole House Water Refining System

A Complete Water Refining System For Your Home

Rid your water of hardness minerals (calcium and magnesium) plus filter out bad tastes and odor caused by chlorine, chloramines or organic matter.

The unique two tank system keeps the two media beds separate, allowing for more carbon contact which greatly improves the removal of chlorine, chloramines and organics. Because the carbon typically needs to be replaced before the softening resin, the two tank system allows for easy cost effective replacement. You get the same benefit as a separate water softener and whole-house carbon filter for a much lower price as the single control valve operates both systems.

Now you can enjoy truly refined water throughout your home!

- ➔ Great tasting water
- ➔ Odor-free. No chlorine!
- ➔ Soft skin & silky hair
- ➔ Spot free dishes
- ➔ Brighter laundry
- ➔ Easier cleaning
- ➔ Protect plumbing & water using appliances from scale build-up

Soft, Clean
Truly Refined
Water



IAPMO R & T Certified
Against NSF/ANSI 44 and
CSA B483.1



Certified by IAPMO R&T
to NSF/ANSI 42 for
Chlorine Reduction



DUAL TANK HTO - HARDNESS & TASTE & ODOR

Part #	Model	Brine Tanks Type, Size, Color	Resin Tanks Size & Colour	Weight (LBS)
89 Series 1" Upflow				
15101000-1	HT89UF-100HTO	BTS-100 Black	9x48 Black	164
15101018-1	HT89UF-150HTO	BTS-100 Black	10x54 Black	181
15101036-1	HT89UF-200HTO	BTR-145 Black	12x52 Black	224
15101039-1	HT89UF-250HTO*	BTR-145 Black	13x54 Black	233
15101042-1	HT89UF-300HTO*	BTR-200 Grey	14x65 Natural	242
785 Series Upflow				
15101043-1	HT785UF-100HTO	BTS-100 Black	9x48 Black	164
15101061-1	HT785UF-150HTO	BTS-100 Black	10x54 Black	181
15101079-1	HT785UF-200HTO	BTR-145 Black	12x52 Black	224
15101082-1	HT785UF-250HTO*	BTR-145 Black	13x54 Black	233
15101085-1	HT785UF-300HTO*	BTR-200 Grey	14x65 Natural	242

*Media not loaded in mineral tank.




89 valve



Features:

- ➔ Two tank carbon system keeps media beds separate, allowing for more carbon contact for improved chlorine, chloramines and organic removal
- ➔ Carbon can be replaced without replacing the resin bed
- ➔ Same benefit as separate systems but with cost of only one control valve
- ➔ Salt-efficient Up Flow Regeneration
- ➔ Exclusive NSF Certified electronic control valve with seven year warranty featuring proven piston, seal & spacer technology
- ➔ Fully adjustable cycles allow customization to the most efficient settings based on specific water quality requirements
- ➔ Backlit LCD display screen with no confusing codes or symbols. The 89 Control features a large 4 line / 80 character touch pad screen. The 785 control features a 2 line / 32 character display with rotating information display (i.e. date last regenerated, volume remaining).
- ➔ NSF Certified fibreglass pressure tank with lifetime warranty
- ➔ IAPMO R & T Certified against NSF/ANSI 44 and CSA B483.1
- ➔ High density polyethylene salt tank with lifetime warranty
- ➔ Brine safety valve for added overflow protection
- ➔ Plastic salt grid prevents salt bridging
- ➔ Unique precision turbine meter is incorporated in system bypass valve – saving space over 4" of floor space
- ➔ Time saving quick connect fittings on brine line, drain line (with O-ring seal) and power cord for fast and easy installations

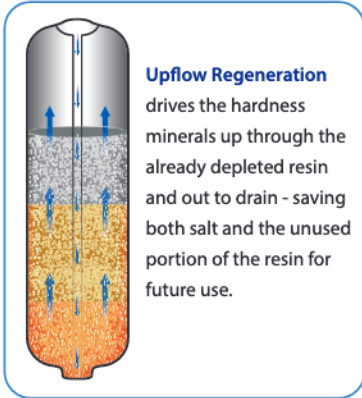

Specifications	HTO100	HTO150	HTO200	HTO250	HTO300
Salt Used - Per Regeneration	6.0 lbs	9.0 lbs	12.0 lbs	15.0 lbs	18.0 lbs
Water Used - Regeneration	86.4 gal	148 gal	162.4 gal	216.0 gal	224.8 gal
Hardness Removal - Grains	25,000	37,500	50,000	67,500	75,000
Tank #1 Carbon Quantity (ft3)	1.0 ft	1.50 ft	2.0 ft	2.5 ft	3.0 ft
Tank #2 Resin Quantity (ft3)	1.0 ft	1.50 ft	2.0 ft	2.5 ft	3.0 ft
Tank Size	9x48	10x54	12x52	13x54	14x65
Tank Jacket / Media Loaded	Yes	Yes	No	No	No
Brine Tank (Inches)	BTR 18.1 x 34.5 BTS 15.0 ² x34.7	BTR 18.1 x 34.5 BTS 15.0 ² x34.7	20.3 x 37.4	20.3 x 37.4	23.0 x 40.5
Salt Storage Capacity	BTS 240 lbs BTR 270 lbs	BTS 240 lbs BTR 270 lbs	350 lbs	350 lbs	420 lbs
Flow Rate @ 15 psi Pressure Drop	7.2 gpm	7.4 gpm	9.0 gpm	9.2 gpm	9.2 gpm
Flow Rate @ 25 psi Pressure Drop	10.0 gpm	10.1 gpm	11.9 gpm	12.1 gpm	12.1 gpm
Back Wash Flow Rate - 89	4.5 gpm	5.0 gpm	7.0 gpm	7.0 gpm	9.5 gpm
Back Wash Flow Rate - 785	4.0 gpm	5.0 gpm	7.0 gpm	7.0 gpm	10.0 gpm
Shipping Weight	154 lbs	171 lbs	214 lbs	225 lbs	232 lbs
Regeneration Type	Up Flow				
Plumbing Connections	89 valve 1" 90 degree elbows. 785 valve units 3/4" 90 degree elbows				
Resin Type	Aquafine 8% cation exchange resin				
Carbon Type	Catalytic Carbon				
Electrical Requirements	Input 120V 60 Hz - Output 12V 650mA				
Water Temperature	Min 39 - Max. 100° F				
Water Pressure	Min. 20 - Max. 125 psi				



Also available with 785 valve

Brine Tank Included

Your Local Water Treatment Professional



Hydrotech®

TOLL-FREE 1-877-288-9888

www.hydrotechwater.com

Regina, SK • Cambridge, ON • Whitestown, IN
Houston, TX • Phoenix, AZ • Guadalajara, MX

