AQUA FLO

Aqua Flo Under Sink Filtration Systems

Choose A Filtration System To Meet Your Needs

The 475 Quick Change Filter Series offers 3, 2 & Single Stage options to provide solutions for a variety of water problems including sediment, rust, bad taste & odor



- 1. Three Stage Ultra Filtration
- 2. Dual Stage Sediment / Taste & Odor
- 3. Single Stage Sediment
- 4. Single Stage Coconut Carbon Block
- 5. Single Stage Granular Activated Carbon




Change filters in seconds without turning off water!
No tools required!

Choose A Filtration System

- 3 Stage Ultra Filtration reduces lead, VOC (pesticides, herbicides, chemicals), THM, chlorine, taste, odor & sediment as small as 0.2 microns.
- Dual Stage Sediment / Taste & Odor removes sediment, bad tastes and odors. 5 Micron removal.
- Single Stage Sediment removes suspended sediment that makes water cloudy. 5 Micron removal.
- Single Stage Coconut Carbon Block removes bad tastes & odors while filtering out particles as small as 10 microns.
- Single Stage Granular Activated Carbon removes bad taste and odor. Perfect for chlorine reduction on clean municipal water supplies








6.3"w x 3.9"d x 13.4"h



2.8"w x 3.2"d x 12.4"h

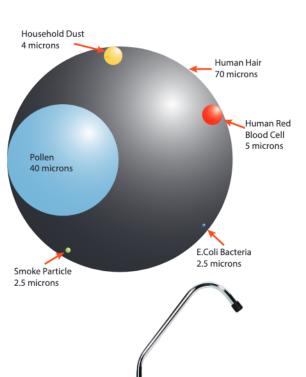

Standard chrome faucet included.

Designer faucets available.

475 QC Series Filter Systems

Description	Filter 1	Filter 2	Filter 3
475QC-3 TRIPLE STAGE ULTRA FILTER	SED	COC	UF
475QC-2 DOUBLE STAGE DUAL FILTER	SED		COC
475QC-1C SINGLE STAGE COCONUT CARBON FILTER	coc		
475QC-1S SINGLE STAGE SEDIMENT FILTER	SED		
475QC-1G SINGLE STAGE GAC FILTER	GAC		

475 QC Series Filters

Description	MICRON	FLOW RATE	CAPACITY (GALLONS)
SEDIMENT FILTER SED-10 BLUE (475 Q SERIES)	5	1 GPM	900
CARBON FILTER COC-10 PURPLE (475 Q SERIES)	10	1 GPM	1,500
CARBON FILTER GAC-10 YELLOW (475 Q SERIES)	-	0.7 GPM	1,500
ULTRA FILTER UF-10 BLACK (475 Q SERIES)	0.2	0.7 GPM	1,500

Feed Water Guidelines			
Iron (Fe)	<0.2ppm		
Manganese (Mn)	<0.05ppm		
Hydrogen Sulfide	0.0ppm		
Turbidity	<1.0NTU		
Feed Water Pressure	40-100psi		
Temperature	40-100°F		
pH Range	3.0-11.0		
Note: Pretreatment suggested if conditions exceed			

Note: Pretreatment suggested if conditions excee parameters. Must be installed on potable water.

AQUA FLO

A Division of

Canature

WaterGroup

Your Local Water Specialist